


|   |                        |   |
|---|------------------------|---|
| LOC/DME I-ULJ<br><b>111.15</b><br>Chan <b>48(Y)</b> | APP CRS<br><b>293°</b> | Rwy Idg <b>7001</b><br>TDZE <b>128</b><br>Apt Elev <b>133</b> |
|---|------------------------|---|

# ILS or LOC RWY 29

BEDFORD/LAURENCE G. HANSCOM FIELD (BED)

|   |                  |   |
|---|------------------|---|
| <b>▽</b> ADF required. VDP NA when using Boston altimeter setting.<br><b>▲</b> If local altimeter setting not received, use Boston altimeter setting and increase all DAs to 377 feet and all MDAs 60 feet. | <b>MALSR</b><br> | <b>MISSED APPROACH:</b> Climb to 2000 direct BE LOM and hold. |
|---|------------------|---|



|                             |   |  |                                |                                  |                                |
|-----------------------------|---|--|--------------------------------|----------------------------------|--------------------------------|
| <b>ATIS</b><br><b>124.6</b> | <b>BOSTON APP CON</b><br><b>124.4 279.6</b> | <b>HANSCOM TOWER*</b><br><b>118.5 (CTAF) 236.6</b> | <b>GND CON</b><br><b>121.7</b> | <b>CLNC DEL</b><br><b>121.85</b> | <b>UNICOM</b><br><b>122.95</b> |
|-----------------------------|---|--|--------------------------------|----------------------------------|--------------------------------|

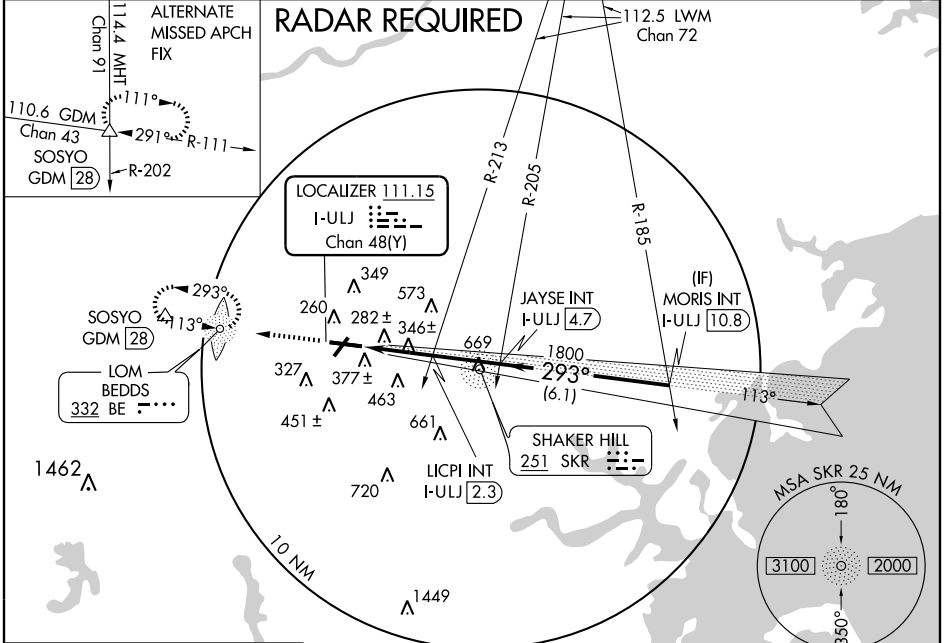

NE-1, 02 JUN 2011 to 30 JUN 2011

NE-1, 02 JUN 2011 to 30 JUN 2011

ELEV 133 **D**

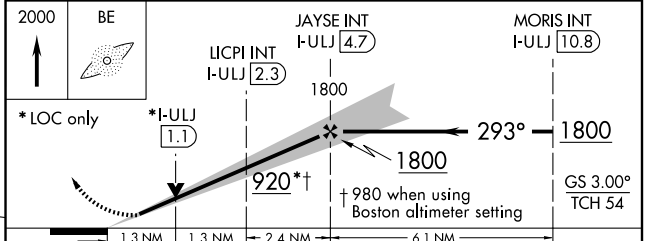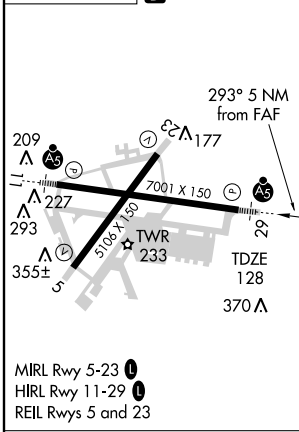

| CATEGORY           | A                    | B                      | C                      | D                      |
|--------------------|----------------------|------------------------|------------------------|------------------------|
| S-ILS 29           |                      | 328-½                  | 200 (200-½)            |                        |
| S-LOC 29           | 920-½<br>792 (800-½) | 920-¾<br>792 (800-¾)   | 920-1¾<br>792 (800-1¾) | 920-2<br>792 (800-2)   |
| CIRCLING           | 920-1<br>787 (800-1) | 920-1¼<br>787 (800-1¼) | 920-2¼<br>787 (800-2¼) | 920-2½<br>787 (800-2½) |
| LICPI FIX MINIMUMS |                      |                        |                        |                        |
| S-LOC 29           | 600-½ 472 (500-½)    | 600-¾ 472 (500-¾)      | 600-1 472 (500-1)      | 600-1 472 (500-1)      |
| CIRCLING           | 680-1 547 (600-1)    |                        | 700-1½ 567 (700-1½)    | 780-2 647 (700-2)      |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| FAF to MAP 4.6 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 4:36 | 3:04 | 2:18 | 1:50 | 1:32 |